


"800" VERSION, RH - STRAIGHT EXIT

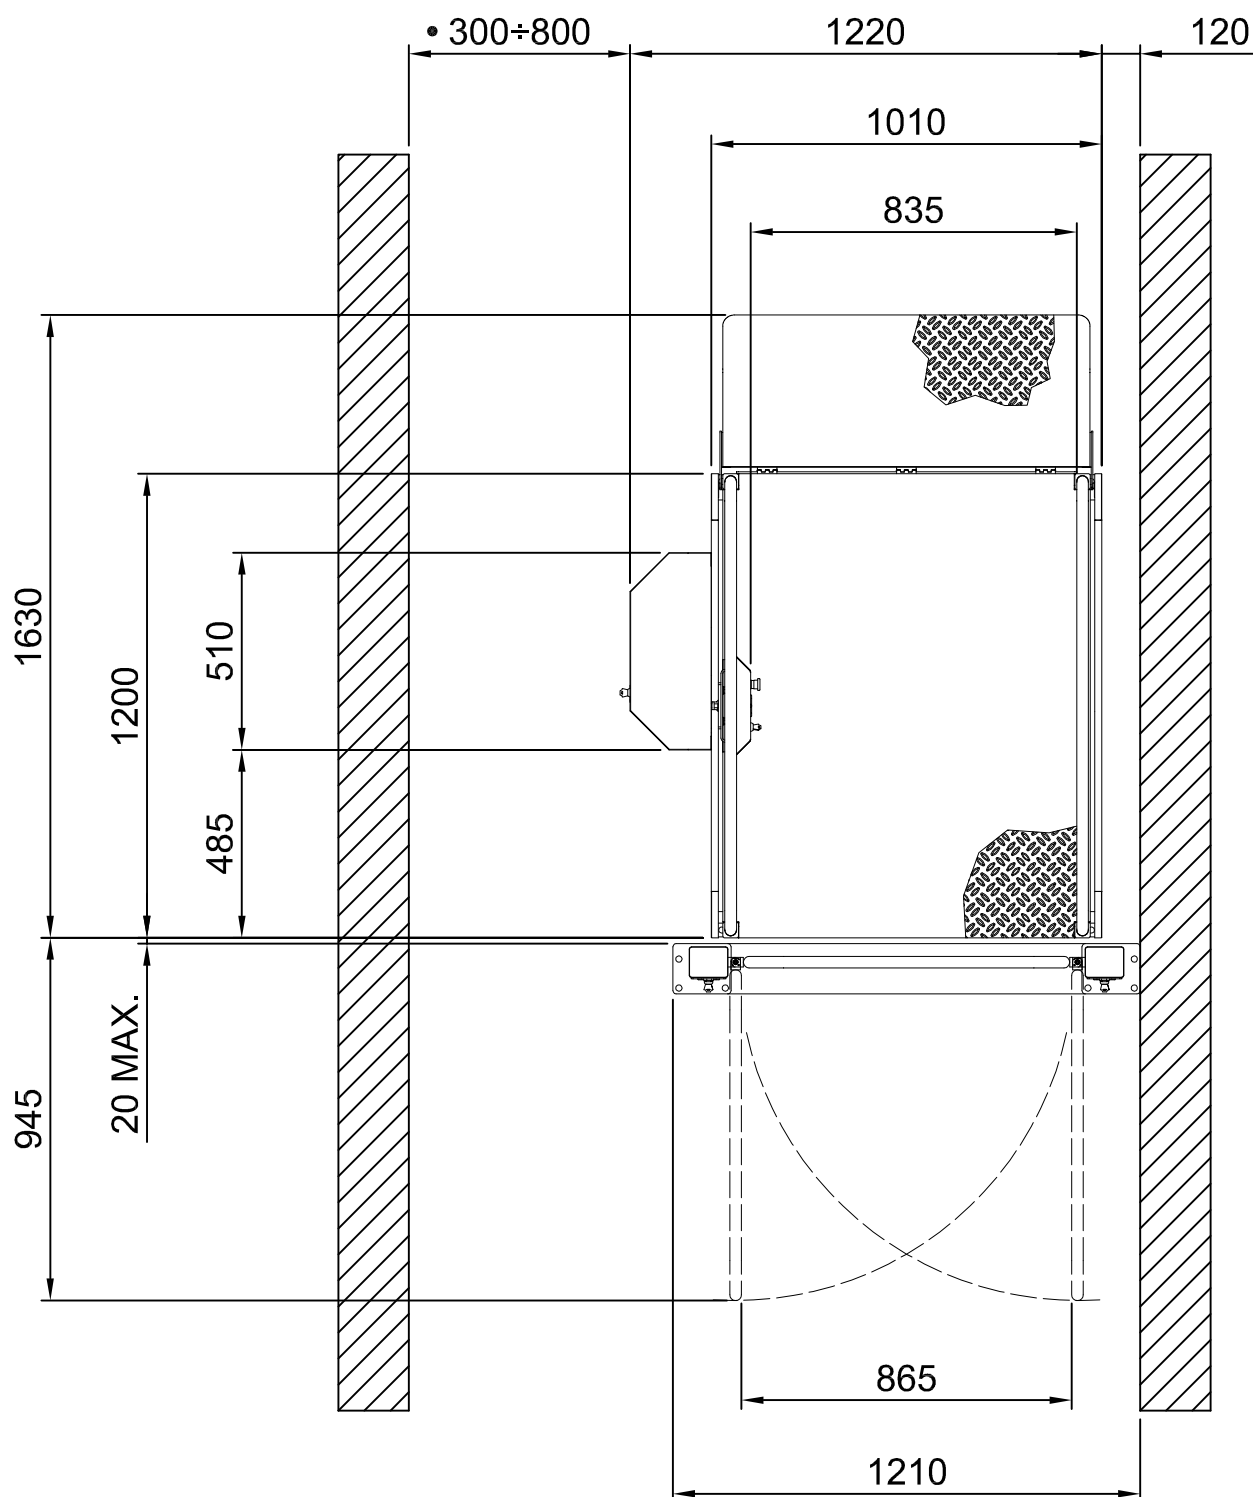

• SEE INSTRUCTION LEAFLET (Pg.3.1)


Pg 1.1/4.1

DATA	CODICE	REV.
01/01/08	8622900	D

TECHNICAL FEATURES

Rated Load	Power	Voltage	Auxiliary voltage	Speed
250 [daN]	0.6 [KW]	230 AC [V-mon.]	24 [V-DC]	[2.4m/min.]

"800" VERSION, LH - STRAIGHT EXIT

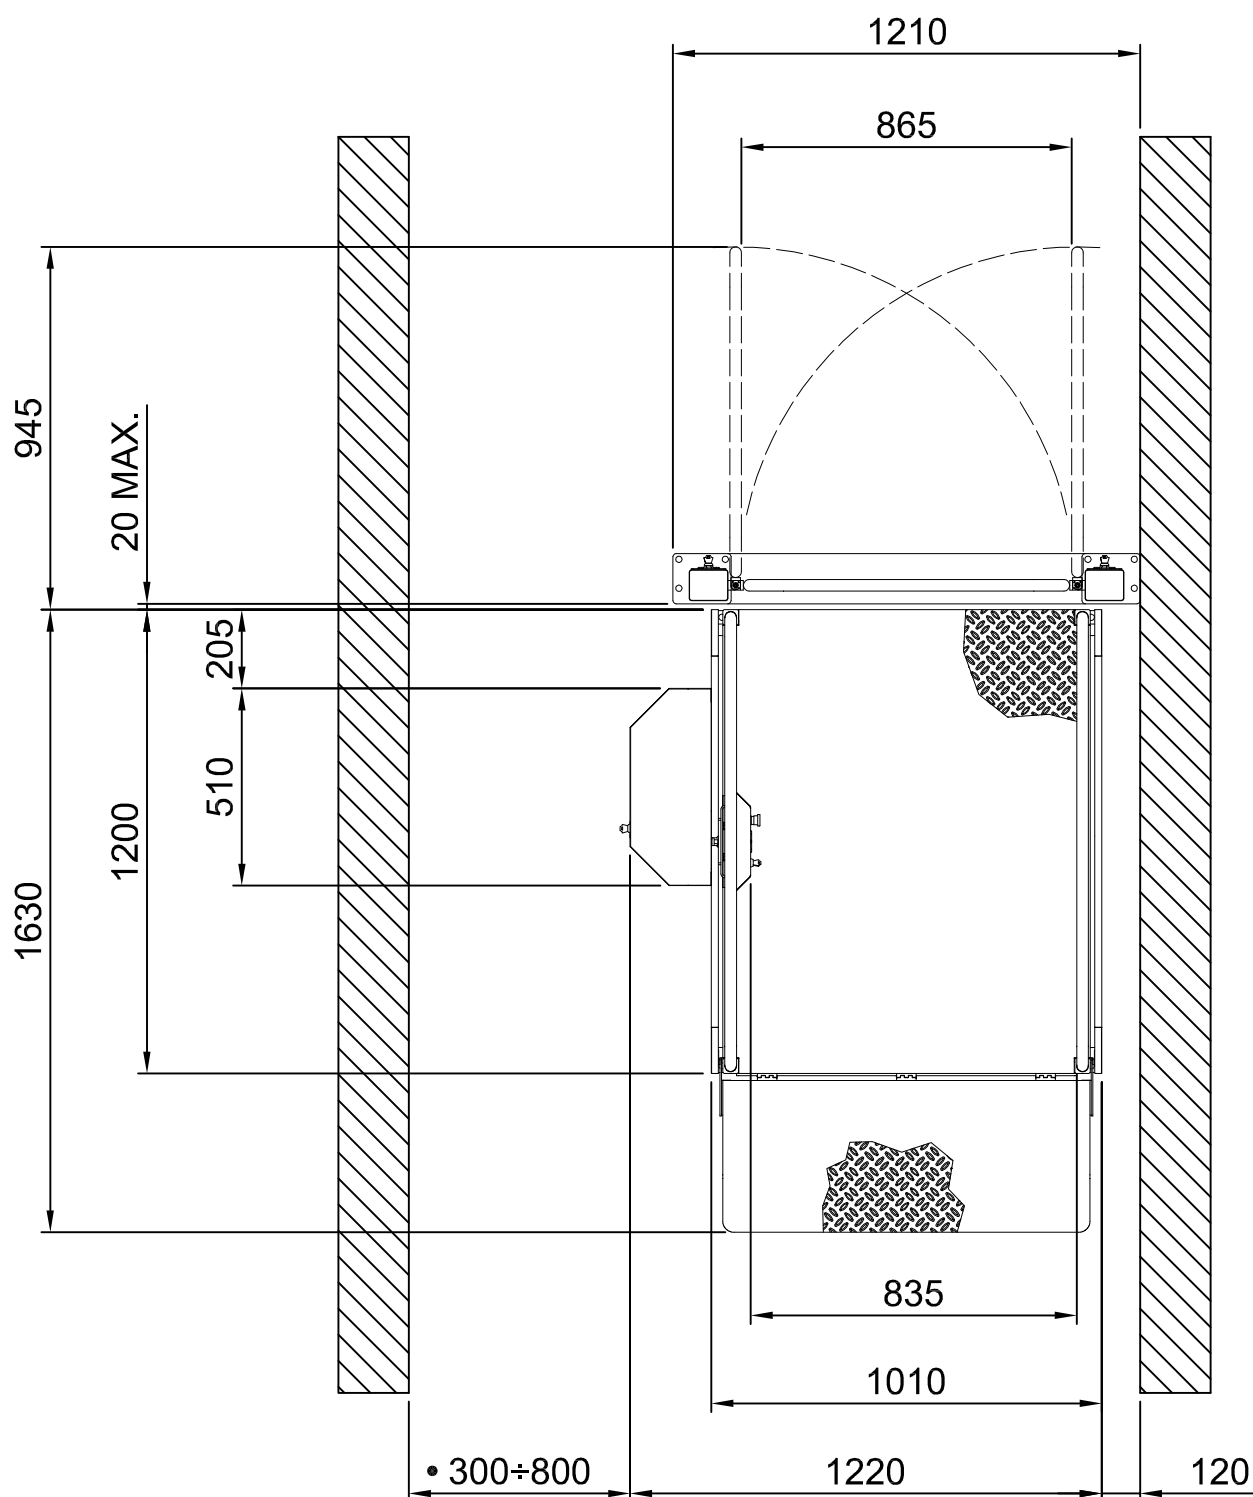

• SEE INSTRUCTION LEAFLET (Pg.4.1)


Pg 2.1/4.1

DATA	CODICE	REV.
01/01/08	8622900	D

TECHNICAL FEATURES

Rated Load	Power	Voltage	Auxiliary voltage	Speed
250 [daN]	0.6 [KW]	230 AC [V-mon.]	24 [V-DC]	[2.4m/min.]

DIAGRAM FOR DRILLING HOLES FOR CORRUGATED
CABLE HOSES - RH VERSION

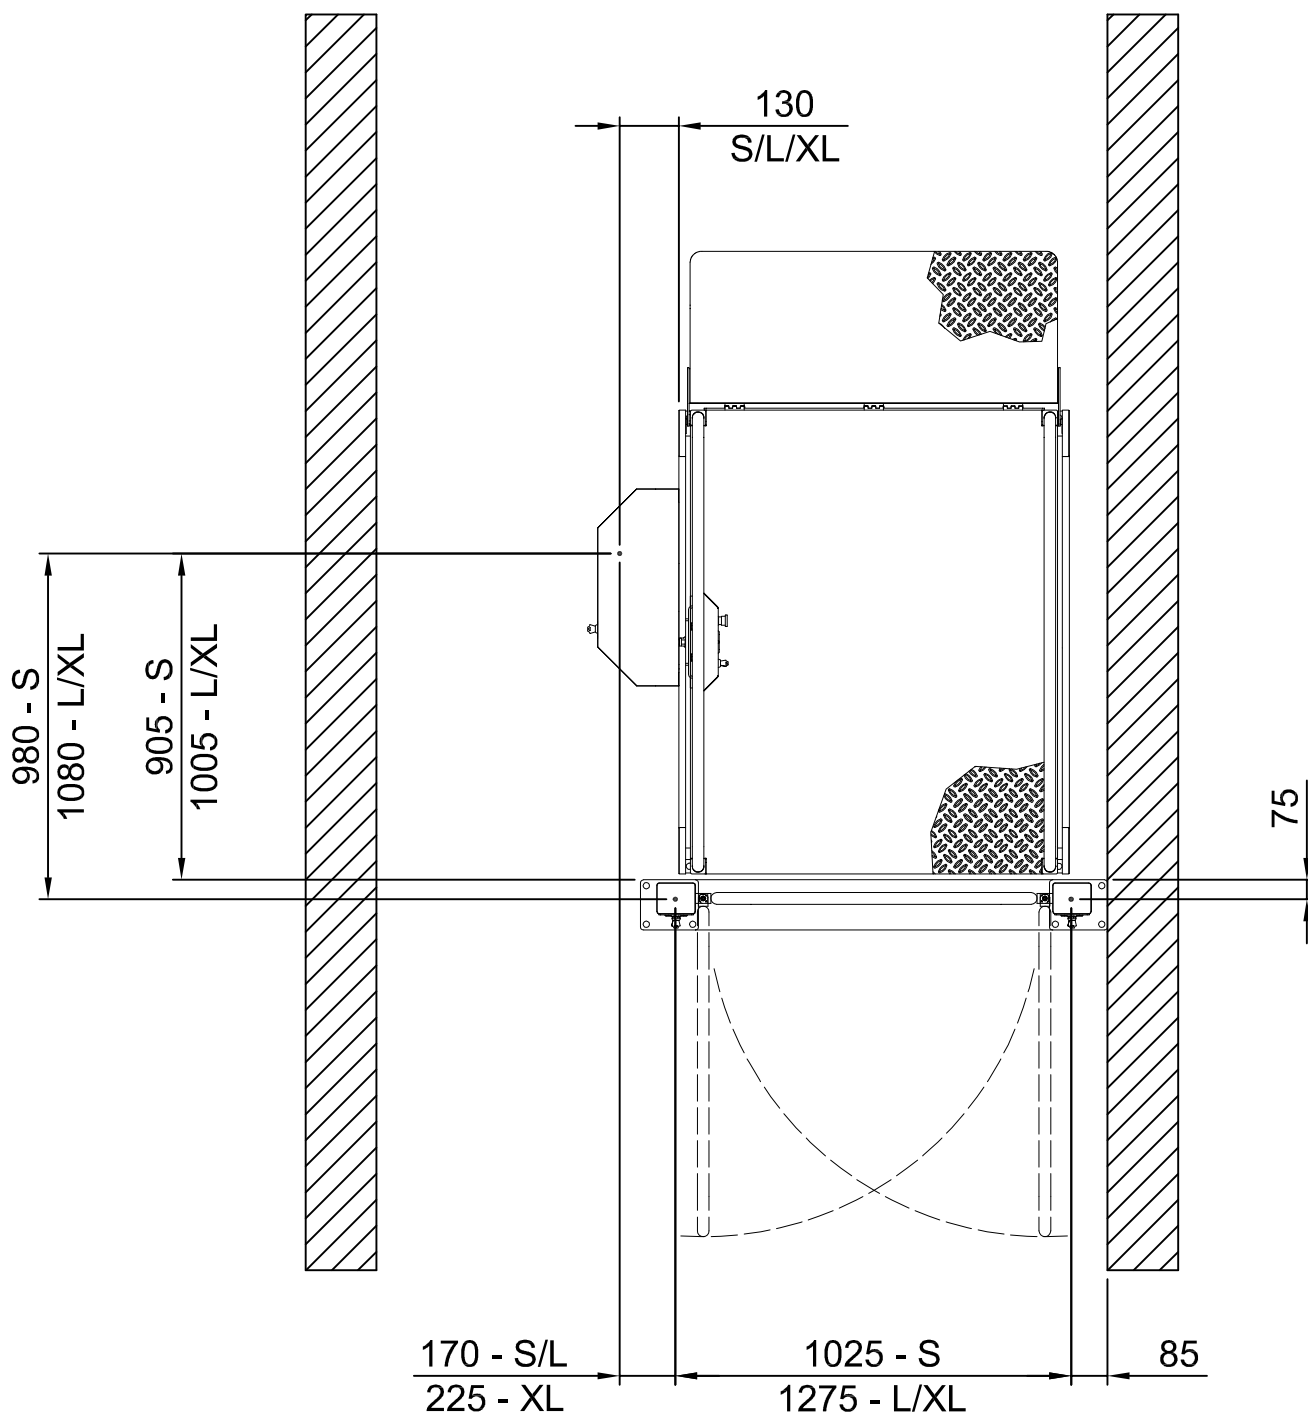


Pg 3.1/4.1

DATA	CODICE	REV.
01/01/08	8622900	D

TECHNICAL FEATURES

Rated Load	Power	Voltage	Auxiliary voltage	Speed
250 [daN]	0.6 [KW]	230 AC [V-mon.]	24 [V-DC]	[2.4m/min.]

DIAGRAM FOR DRILLING HOLES FOR CORRUGATED
CABLE HOSES - LH VERSION

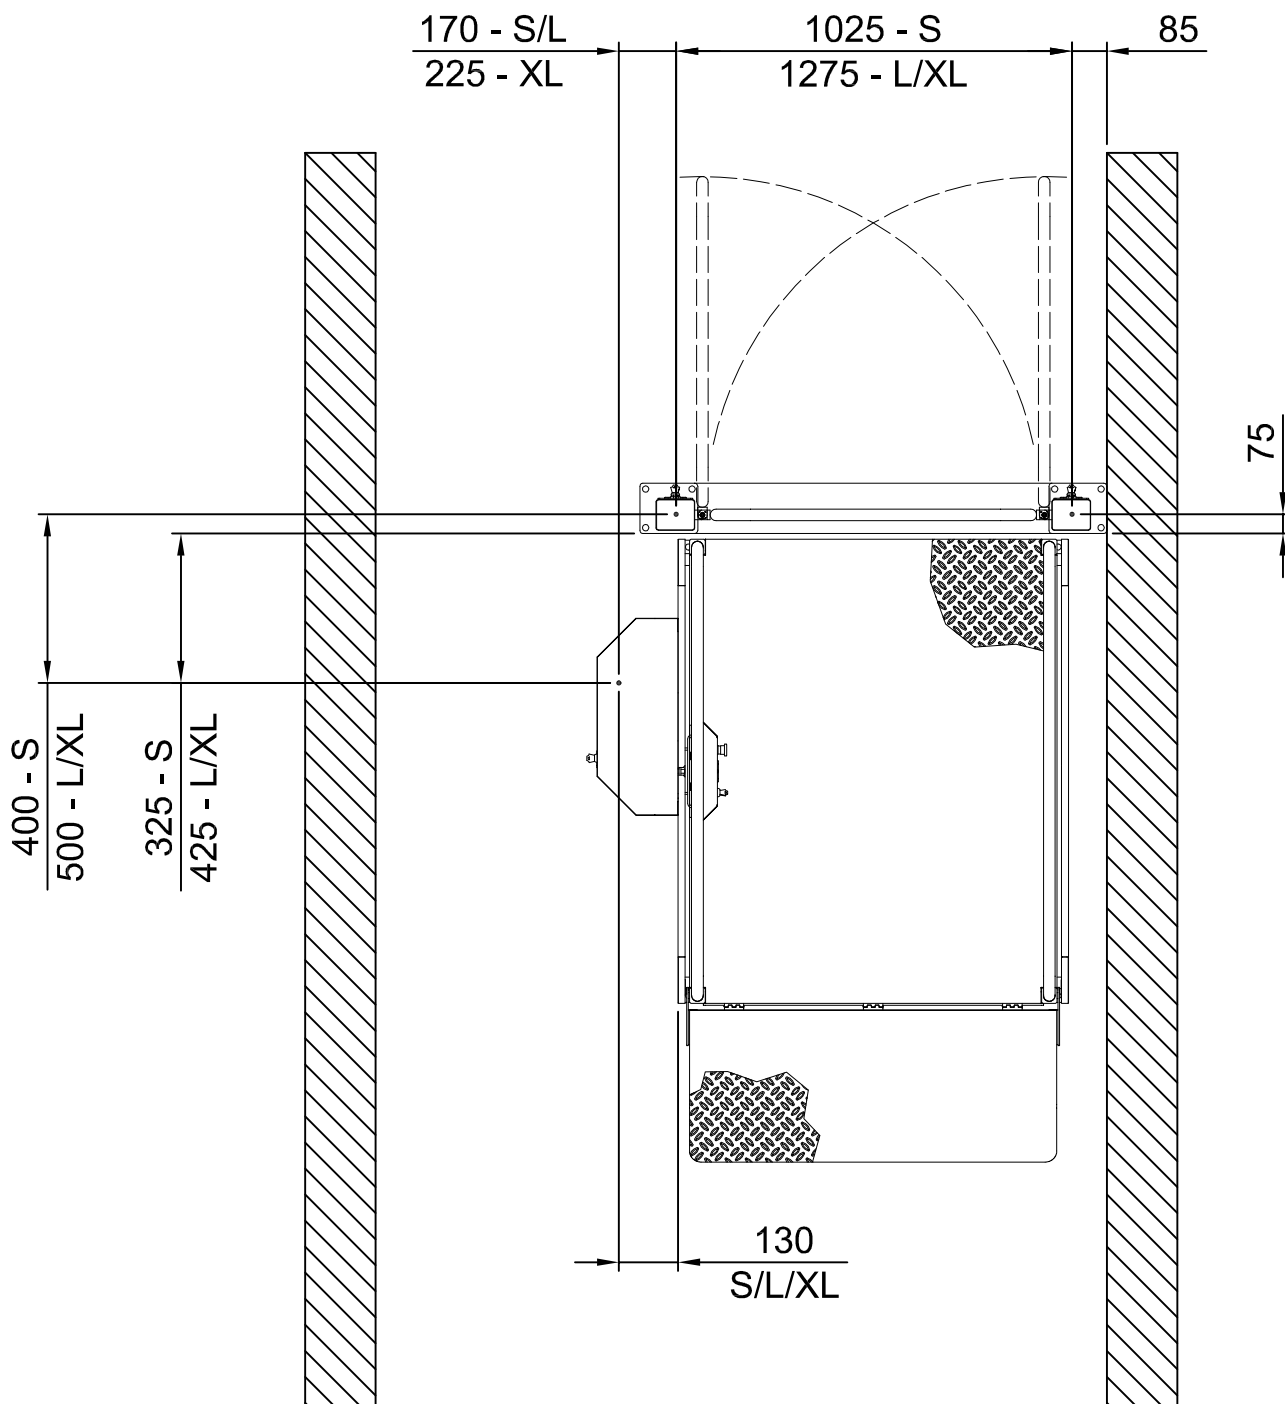

Pg 4.1/4.1

DATA	CODICE	REV.
01/01/08	8622900	D

TECHNICAL FEATURES

Rated Load	Power	Voltage	Auxiliary voltage	Speed
250 [daN]	0.6 [KW]	230 AC [V-mon.]	24 [V-DC]	[2.4m/min.]